

CBS 1000
S E R I E S

Twin 1.5 Gallon Coffee Brewing System

CBS-12H

The Best In Coffee Brewing From The Ultimate In Coffee Machines

The CBS-12H, the dual version of the popular CBS-11H brewer, provides you with the ultimate coffee brewing system available—one that provides delicious coffee and years of dependable service. Its rugged, stainless steel construction stands up to the rigors of years of service, while its portable design lends itself to any service situation. Ask for FETCO® quality, dependability—a better coffee brewing system.

Insulated Satellite Servers

Extend the serving capacity of the CBS-12H brewing system with insulated satellite servers. Satellite servers maintain your coffee at an ideal temperature for extended periods of time, while increasing the accessibility of your coffee service. Heated serving stands, in two convenient heights, are also available for maintaining coffee temperature for even longer periods of time.




CBS-12H in Stainless Steel finish and with two 1.5 gallon insulated satellite servers

FETCO[®]
CORPORATION

Standard Features:

- 1.5 Gallon, Insulated -Heated, Portable, All Stainless Steel Beverage Dispenser with Latched Lid
- Stainless Steel, Gourmet-Size Coffee Brew Baskets
- Brew Basket Double Safety Locks
- Two Independent Open-Type, Leak-Free Dispense Systems
- Fully Automatic Electronic Controls
- Mercury-Type Power Contactor
- Total Serviceability From The Front
- Built-In, Guard-Protected Gauges
- Guard-Protected Faucet
- Hot Water Service
- Self-Locking Container Bottoms

Dimensions & Specifications

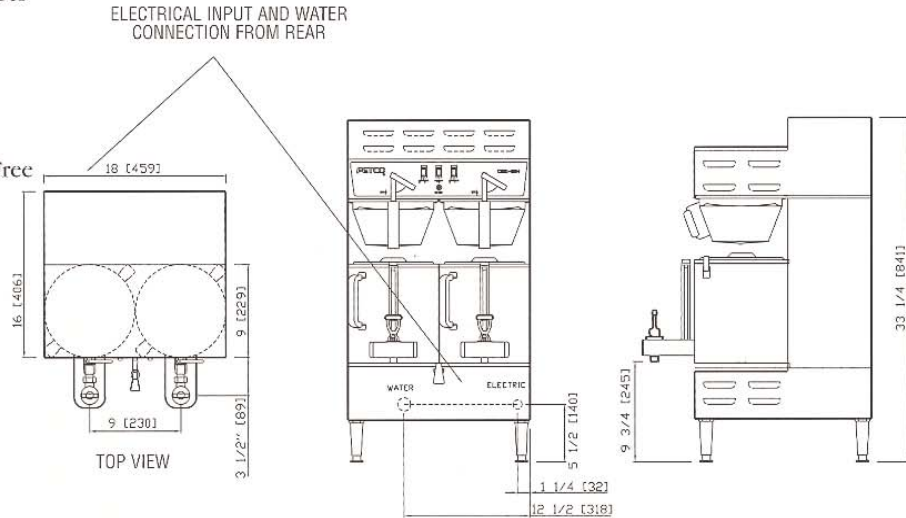

Optional Features:

- Half Batch Brewing Capability
- Iced Tea Brewing Capability
- Color Stainless Steel Finish
- Custom & Export Voltage

Water Requirements: 20-75 psig, 1-1/4 gpm flow rate. Water inlet is 3/8 Male Flare
 Tank Capacity: 6 gallons

Accessories:

- 1.5 Gallon, Insulated-Heated Beverage Dispenser with Latched Lid
- Container Warming Stand
- Container Non-Warming Stand
- Brewer Drip Tray
- Service Station Drip Tray

Standard Electrical Configurations & Brewing Efficiency

Electrical Config. Code	Heater Configuration	Voltage	Phase	Wires	KW	Maximum Amp draw	Brews per Hour	
							Cold Water	Hot Water
C12031	2 x 3000 watt	120/208	single	3 + ground	4.6	22.4	7.4	17.2
		120/220	single	3 + ground	5.2	23.7	8.6	19.9
		120/240	single	3 + ground	6.1	25.8	9.9	22.0
C12041	1 x 4000 watt	120/208	single	3 + ground	6.1	29.6	9.9	22.0
		120/220	single	3 + ground	6.9	31.3	11.5	22.0
		120/240	single	3 + ground	8.1	34.1	13.2	22.0
C12991	Custom Export Voltage – Consult Factory							

Shipping Dimensions:

- Set: 32" x 21" x 25"
- Shipping Weight: Total: (Brewer and 2 Dispensers) 95lbs/43Kg
- Additional Dispenser: 14lbs/6.4Kg

This product is approved by one or more of the following marks:



FETCO® Corporation is a proud and active member of these organizations:



Food Equipment Technologies Company
 640 Heathrow Drive, Lincolnshire, IL 60069 USA
 Phone: 847.821.1177 800-FETCO 99 Fax: 847.821.1178
 Internet: www.fetco.com E-mail: sales@fetco.com